




Flexible feeding components


Flip conveyor 200 & flip conveyor 300

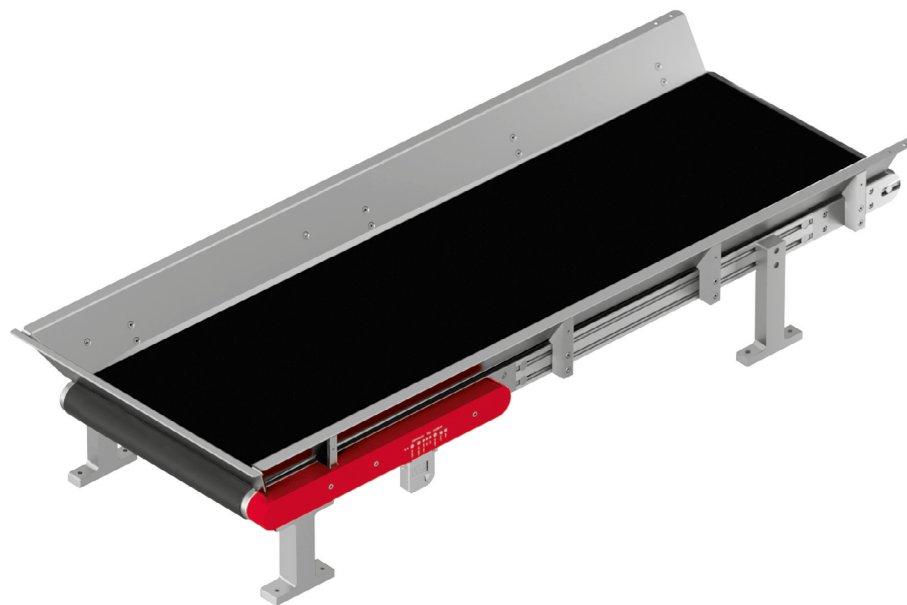

- Suitable for virtually all part geometries and available with various conveyor belts for optimal provision of the conveyed items for flexible feeding systems
- Continuous adjustment of the operating parameters and onboard drives to alleviate integration
- Large image area, 24 V operating voltage and the possibility for quick emptying

Type	Flip conveyor 200	Flip conveyor 300
A	200 mm	300 mm
B	220 mm	320 mm
C	318 mm	418 mm
D	210 mm	310 mm
E	1044 mm	1044 mm
F	154 mm	154 mm
G	218 mm	218 mm
H	1000 mm	1000 mm
I	51 mm	51 mm
J	112 mm	112 mm

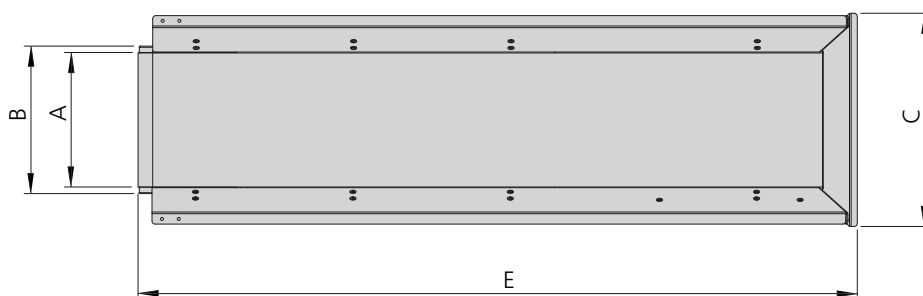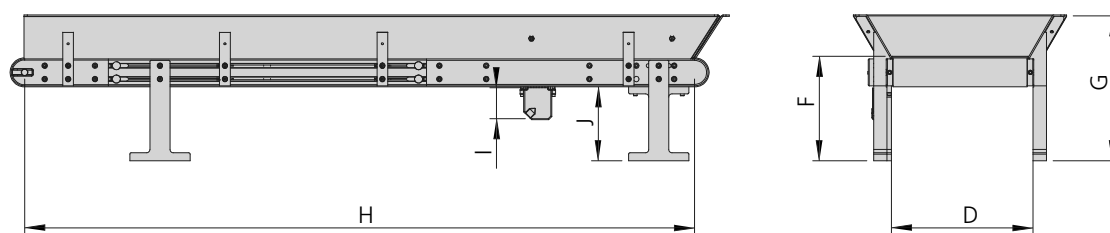



Flip conveyor	
Operating temperature	10 - 50 °C
Bearing temperature	0 - 80 °C

Type	Flip conveyor 200	Flip conveyor 200	Flip conveyor 300	Flip conveyor 300
Order number	50436250	50436249	50436252	50436251
Belt	white	black	white	black
Total current [max]	7 A	7 A	7 A	7 A
Control voltage	20-30 V	20-30 V	20-30 V	20-30 V
Load voltage	9-30 V	9-30 V	9-30 V	9-30 V
Net weight	23 kg	23 kg	25 kg	25 kg
Max. part weight	50 g	50 g	50 g	50 g
Max. part size	40x40 mm	40x40 mm	40x40 mm	40x40 mm
Recommended pre-fuse	7 A D UL 1p C60N	7 A D UL 1p C60N	7 A D UL 1p C60N	7 A D UL 1p C60N
Relative activation duration of the actuators	< 15 %	< 15 %	< 15 %	< 15 %
Standard interface	Multi I/O	Multi I/O	AC servo	AC servo
Protection type	IP 50	IP 50	IP 30	IP 30

Conveyor belt for flip conveyor	B200	B200	B300	B300
Order number	50465826	50465827	50465823	50465825
Net weight	0.01 kg	0.01 kg	0.01 kg	0.01 kg
Belt	white	black	white	black